

Penal-Ware® 1741ADAFA Series

Penal-Pak Wall Shower, Front Access - ADA Compliant



1741-ADA-FA-8MV-FH

Fixture May Show Some Available Options

Please visit **www.acorneng.com** for most current specifications.

Penal-Pak Wall Shower, Front Access - ADA Compliant

Shower is designed to be installed on a finished wall and serviced through removable Front Panel. Mounting Frame is provided. Fixture is fabricated from 14 gauge, type 304 stainless steel and the exterior has a #4 satin finish. Unit conforms with ANSI, UFAS and ADA requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority.

NOTE: Not intended for use in California.

Showerhead. There are two Heads provided:

- 1. The Fixed Head is vandal-resistant. The spray pattern can only be changed by the use of an Allen Wrench inserted through the Nozzle.
- 2. The Handheld Shower includes a 60" long, stainless steel Hose, Hand Spray, Vacuum Breaker, Quick-Disconnect and Mounting Bracket. Unit is optionally available with suffix option -FH Fixed Head mounted at 48" in lieu of Handheld Shower.

Valves (ADA compliant) available are:

- 1. Air-Control pneumatically operated, Pushbutton Valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds of force to activate Valve. Timing is from 5 to 60 seconds. Air-Control Valves can be remotely located up to 10 feet from the operating Pushbuttons.
- 2. Electronic Valve System using Modular Valve Controller for water metering through precise electronic control of a Solenoid Valve. Valve timing is from 1 second to 9 minutes. Modular Valve Controller can be remotely located up to 100 feet from the operating pushbutton.

Regularly furnished items include an ADA compliant Control Valve, a Showerhead, a Handheld Shower with Quick-Disconnect and Mounting Bracket, a Recessed Soap Dish, Mounting Frame and Hardware. Grab Bar and Folding Seat by others.


GUIDE SPECIFICATION

Provide and install an Acorn Penal-Ware, ADA Compliant, Front Access Wall Shower (specify model number and options). Shower Panel shall be fabricated from 14 gauge, type 304 stainless steel and shall have a #4 satin finish. Exposed trim shall be chrome-plated brass. Fixture shall be furnished with a fixed Showerhead, a Handheld Shower with Vacuum Breaker, Quick-Disconnect and Mounting Bracket. Shower shall be provided with an ADA compliant Control Valve. A stainless steel recessed Soap Dish shall be factory installed. Fixture shall be provided with necessary fasteners for proper installation. Units to conform with ANSI, UFAS and ADA requirements for accessibility.

Page 1 P.1741ADAFA Revised: 06/11/2021

|--|

Penal-Ware®: 1741ADAFA Penal-Pak Wall Shower, Front Access - ADA Compliant							
WALL THICKNESS AND TYPE (Must Specify) Thickness: Type: Concrete Block Steel MODEL NUMBER AND OPTIONS SELECTION			ELECTION (Continued) ol® (Electronic) Single Temp Hot & Cold				
BASE MODEL NUMBER 1741-ADA-FA Penal-Pak Wall Shower - ADA Compliant - Front Access		-PPZ1	Programmable (Electronic) w/9VDC Plug-In Transformer -PPZ1 Single Temp Programmable Piezo Button -PPZ2 Hot & Cold Programmable Piezo Buttons				
/ALVE SELECTION Air-Control (Pneumatic) ☐ -03-M-MA2 Manifolded, Single Temp, Metering		Valve By ☐ -9	lve By Others 9 Punched for Valve by Others				
-04-M-MA -04-M-MA -8 -8 -8MV -8MV Master-Tro	-MA2 Manifolded, Hot & Cold, Metering king Valve (SV16) ASSE Compliant T/P Balancing Mixing Valve w/ Patented Ligature Resistant and Vandal Resistant Tri-Lever Handle ASSE 1016 Compliant T/P Temperature/ Pressure Balancing Mixing Valve w/ Single- Temp Metering Valve & Patented ADA Compliant Ligature Resistant Tri-Lever Handle **Trol** (Electronic)		Brass Body Valve Hemispherical Pushbutton (Pneumatic Only) Transformer, 120VAC to 24VAC (-MVC option only) RHEAD OPTIONS Conical Shower Head Flow Control 2.0 GPM (Not Intended For Use in California) Fixed Head at 48" in Lieu of Handheld Shower Penal Showerhead w/Lockable Universal Ball Joint Penal Showerhead w/Lockable Up/Down Ball Joint Space Saver Showerhead 20° Discharge				
☐ -EVS2 ☐ -EVSP1 ☐ -EVSP2	Hot & Cold Single Temp, Piezo Button Hot & Cold, Piezo Buttons	☐ -EG	T OPTIONS Enviro-Glaze, Specify Color:				
Master-TroMTP1MTP2MTPP1MTPP2MTPP2	Il® PLUS (Electronic) Single Temp Hot & Cold Single Temp, Piezo Button Hot & Cold, Piezo Buttons Please visit www.acorneng.com	-LRD	Less Recessed Soap Dish				

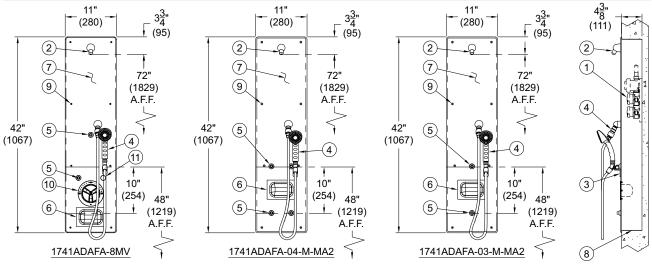

NOTES:

Quantity

- 1. -03-M-MA2 MANIFOLDED AIR-CONTROL VALVE, SHOWN
- 2. PENAL SHOWER HEAD
- 3. HANDHELD SHOWER MOUNTING BRACKET
- 4. HANDHELD SHOWER WITH QUICK DISCONNECT
- 5. CONTROL VALVE PUSHBUTTONS
- 6. RECESSED SOAP DISH

- 7. SHOWER PANEL
- 8. WALL MOUNTING FRAME
- 9. TAMPER RESISTANT SCREWS
- 10. OPTIONAL -8 TEMP/PRESSURE BALANCING VALVE w/ ADA COMPLIANT TRI-LEVER HANDLE

Revised: 06/11/2021

11. BLANK PUSHBUTTON

WARNING: Cancer and Reproductive Harm - www.Posvvarnings.c						
Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2007 Acorn Engineering Company						
Selection Summary		Арр	proved for Manufacturing			
Model No. & Option		Company	Title			

Signature Date Page 2 P.1741ADAFA