



## **Dura-Ware® 2120 Series** Siphon Jet Toilet - On Floor - Floor Outlet



2120-W-3-CN

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### **Siphon Jet Toilet - On Floor - Floor Outlet**

Fixture is arranged to be installed on finished wall from the front side. It is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction. Exterior has a satin finish with an integral contoured seat. The inside of the toilet bowl also has a satin finish. Wall flange is reinforced for maximum strength.

**Toilet** is Siphon Jet type with elongated bowl manufactured to comply with ASME A112.19.3-2008 and CSA B45.4-2008 standards. Toilet requires a minimum of 25 PSI flow pressure and uses a minimum water consumption of 1.28 GPF. Trap has a minimum 3-1/2" seal, will pass a 2-1/8" ball and is fully enclosed. Toilet has a 1-1/2" NPT flushing inlet connection and a 7-1/2" gasketed waste with 6" mounting centers. Connecting hardware provided by installer.

**Flush Valve** supply is additionally available for exposed or concealed flush valve styles in 1.28 GPF, 1.6 GPF or 3.5 GPF with 1-1/2" NPT connection.

### **GUIDE SPECIFICATION**

Provide and install Acorn Dura-Ware Siphon Jet Toilet (specify model number and options). Fixture shall be fabricated from 16 gage, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a satin finish with an integral contoured toilet seat. Toilet shall be concealed siphon jet type with an elongated bowl and a self-draining flushing rim. Toilet shall be ASME A112.19.3-2008 and CSA B45.4-2008 compliant. Toilet requires a minimum of 25 PSI flow pressure and uses a minimum water consumption of 1.28 GPF. Toilet trap shall have a minimum 3-1/2" seal that shall pass a 2-1/8" diameter ball and be fully enclosed. Toilet waste outlet shall be 7-1/2" Gasketed Waste with 6" mounting centers. Connecting hardware provided by installer.

# Dura-Ware®: 2120 Siphon Jet Toilet - On Floor - Floor Outlet



## WALL THICKNESS AND TYPE (Must Specify)

Thickness: \_\_\_\_\_ Type: ☐ Concrete ☐ Block ☐ Steel

## MODEL NUMBER AND OPTIONS SELECTION:

### BASE MODEL NUMBER

☒ 2120 Siphon Jet Toilet

### SUPPLY (Must Specify)

☐ -T Top (Exposed)  
☐ -W Wall (Concealed)

### FIXTURE MOUNTING AND WASTE (Must Specify)

☒ -3 On-Floor, Floor Outlet

### FLUSH VALVE GPF'S (Must Specify)

☐ -HET 1.28 GPF  
☐ -ULF 1.6 GPF  
☐ -3.5 GPF

### FLUSH VALVE OPTIONS (Must Specify)


Refer to Acorn Dura-Ware Supplementary for Box cover(s) and Access Panel(s)

☐ -FV Flush Valve, Mechanical (N/A for ADA)  
☐ -FVBO Flush Valve by Others  
☐ -FVH Flush Valve, Hydraulic (N/A for Top Supply)  
☐ -FVL Flush Valve, ADA Lever Handle  
☐ -MVCFV Time-Trol Flush Valve (N/A for Top Supply)

## PRODUCT OPTIONS (Must Specify)

☐ -ADA 18" Integral Seat Height  
☐ -BCN Blind Cap Nuts  
☐ -BL Bedpan Lugs  
☐ -CN Cap Nuts (2) (For 5/16"-18 UNC Hardware By Others)  
☐ -EG Enviro-Glaze: Specify Color: \_\_\_\_\_  
☐ -Toilet Exterior Only  
☐ -Toilet Interior  
☐ -FG 14 Gage Housing  
☐ -FT Flood-Trol (N/A for Top Supply)  
☐ -FTA Flood-Trol Auto-Reset (N/A for Top Supply)  
☐ -FTE Flood-Trol Electronic  
☐ -FVT Flush Valve Thru Wall Connection  
☐ -HET High Efficiency Toilet Design  
☐ -HPS High Polish Integral Seat  
☐ -HS-OFLC Hinged Seat, Open Front Less Cover  
☐ -HS-OFWC Hinged Seat w/ Cover  
☐ -PFS Punched for Seat by Others  
☐ -TF Transformer, 120VAC to 24VAC  
☐ -TSC Toilet Shipping Cover  
☐ -VAC AcornVAC System

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

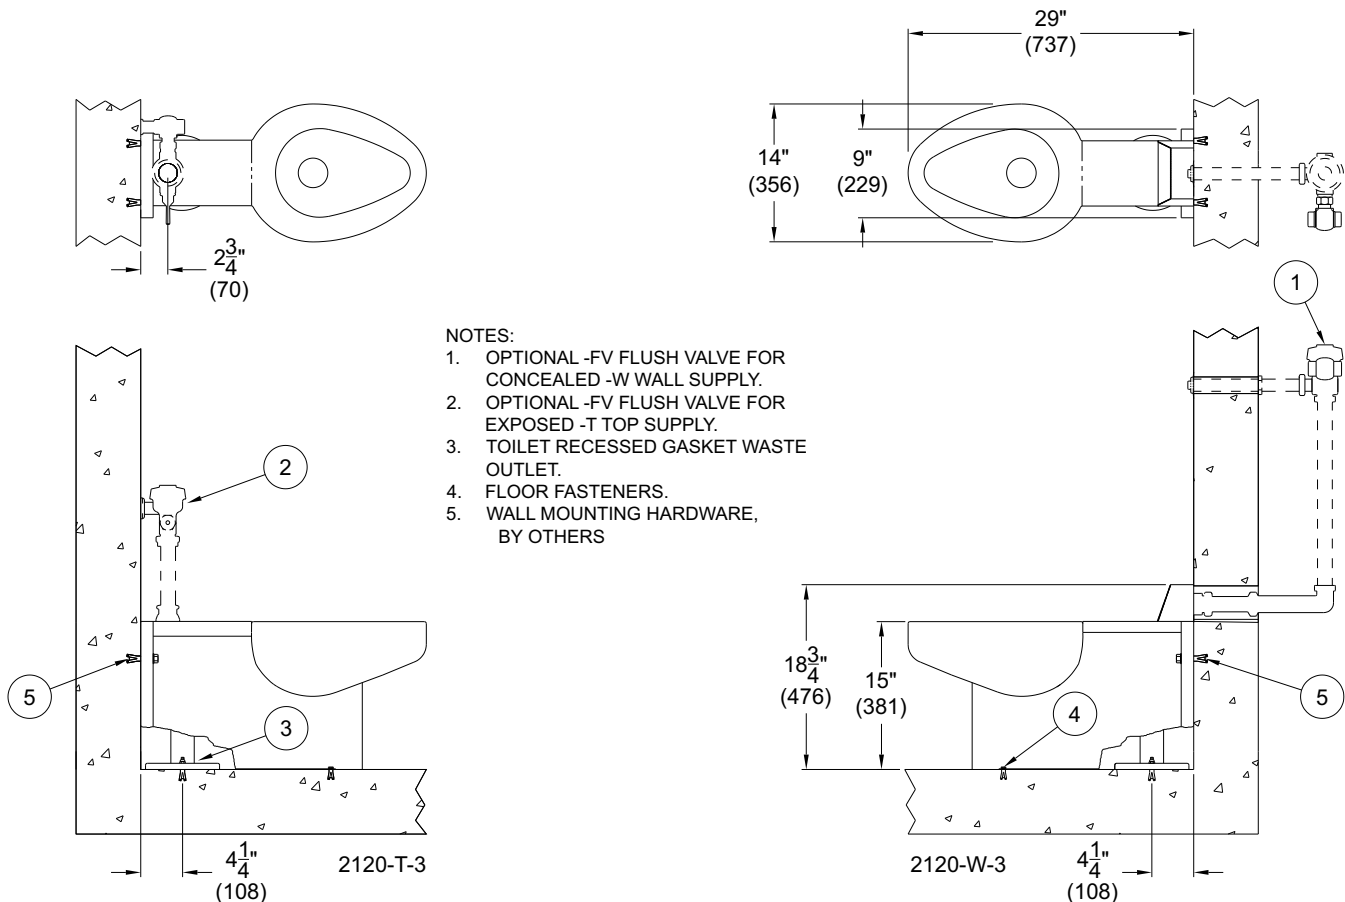

**Important:** Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company

<p><b>Selection Summary</b></p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p><b>Approved for Manufacturing</b></p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>
---	---