




Shower-Ware® 500 Series

Zenith Built-In Showers

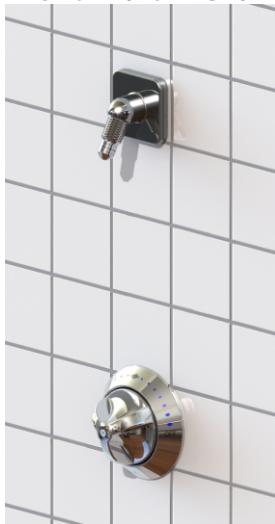

518

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Zenith Built-In Showers

Shower consists of a control valve and a shower head. They are particularly suited for individual applications such as coach showers. Zenith valve and shower head combinations feature the utmost in service desirability.

Riser piping between valve and shower head is furnished by others. Valve supply inlets and shower head include 1/2" NCT socket connections. Air-Control valves and shower head combinations include push-in type tubing connections for PE (polyethylene) riser tubing provided and 1/2" NPS hose end supply connections.

Control Valve body is heavy cast bronze and all wearing parts are contained in a replaceable cartridge. Exposed surfaces are either polished stainless steel or triple chrome-plated. All exposed fasteners are tamper-resistant.

Shower Head is an Acorn Logan Wizard Shower Head with square mounting flange and is regularly furnished front drilled with stainless steel tamper-resistant screws. Connection to the water supply is made via an exclusive O-ring adapter, for back inlet shower heads.

GUIDE SPECIFICATION

Provide and install Acorn Zenith Built-In Showers (specify model number and options). Valve body and shower head shall be solid brass with all exposed parts triple chrome-plated or polished stainless steel. Shower shall be provided with the following optional equipment: (example -F Flow Control, -G Individual Stops).

Shower-Ware®: 500 Zenith Built-In Showers



MODEL NUMBER AND OPTIONS SELECTION

SERIES (Must Specify)

☒ 5 Zenith

SUPPLY (Must Specify)

- ☐ -1 Back Supply (-1, -5 & -7 valves)
☐ -3 Top or Bottom Supply

VALVE (Must Specify)

- ☐ -0 Electronic Valves, Single Temp Metering
☐ -1 Flo-Cloz, H & C
☐ -5 Flo-Cloz, Single Temperature
☐ -6 Air-Control, Single Temperature Metering
☐ -7 Meter-Matic, Single Temperature Metering
☐ -8 T/P Temperature-Pressure Balancing Mixing Valve With Patented Ligature Resistant Tri-Lever Handle (ASSE 1016 Compliant)
☐ -9 Without Valves (Valves by Others) "Shower Head Only"

ELECTRONIC VALVE SELECTION

(Refer to Valves Section for Submittal Data)

- ☐ -EVS1 Electronic Valve System - Single Temp
☐ -EVSP1 Electronic Valve Sys. w/ Piezo Pushbutton
☐ -MVC1 Time-Trol - Single Temp
☐ -CI Cycle Interrupt
☐ -PPZ1 Programmable Piezo Pushbutton (Single Temperature Only)


PRODUCT OPTIONS (Must Specify)

- ☐ -A Anchor Plate
☐ -B Back Plate, Wall Thickness _____
 Wall Type _____
☐ -BA Bent Arm Head
☐ -BAT Battery Operated (-MVC1)

Please visit www.acorneng.com
 for most current specifications.

PRODUCT OPTIONS (cont.)

- ☐ -CSH Conical Shower Head (Ligature Resistant)
☐ -D Soap Dish
☐ -DIV-FX Diverter Valve with Hand Shower & 60" Stainless Steel Hose
☐ -QD Quick-Disconnect
☐ -PSO -QD w/ Positive Shut-Off
☐ -DIV-FH Diverter Valve with additional Fixed Head (Shower options specified apply to both shower heads.)
☐ -F Flow Control, Specify: (Showerhead Only)
☐ 1.4 GPM ☐ 1.6 GPM ☐ 2.0 GPM
☐ -FX Hand Shower With 60" Stainless Steel Hose (In Lieu of Conventional Showerhead)
☐ -QD Quick-Disconnect
☐ -PSO -QD w/ Positive Shut-Off
☐ -G Individual Stops (Flo-Cloz Only)
☐ -GX Individual Checkstops (Flo-Cloz Only)
☐ -H Hand Volume Control
☐ -HL Hi-Lo Mounting Brackets (For Hand Shower)
☐ -K Allen Key Volume Control
☐ -LVR Lever Handle (-5 & -8 Valve Only)
☐ -MS Modular Privacy Compartments (See Diana Privacy Tab)
☐ -MSH Multi-Stream Shower Head
☐ -MV Metering Valve in Riser (Air-Control)
☐ -P Penal Shower Head
☐ -PBH Hemispherical Pushbutton
☐ -RD Recessed Soap Dish
☐ -SB 24" Slide Bar (For -FX Hand Shower)
☐ -TF Transformer
☐ -WS Without Shower Head
☐ -Y Universal Ball Joint
☐ -YY Lockable Universal Ball Joint
☐ -Z Up-Down Ball Joint
☐ -ZZ Lockable Up-Down Ball Joint

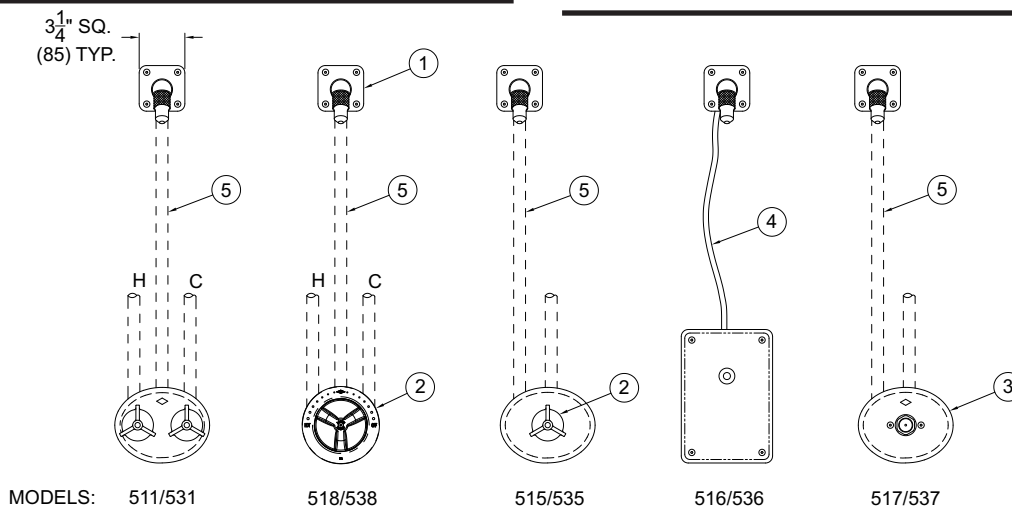

Notes:

1. Flanged Showerhead.
 2. Valve Control Handle.
 3. Valve Escutcheon.

4. 3/8" Low Density PE Tubing.
 5. 1/2" NCT Riser By Others.

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2006 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>