Model S0310

Pedestal Mounted Eyewash, Plastic Bowl



SPECIFICATIONS:

Model S0310 is a pedestal mounted eyewash, with a plastic bowl, ABS plastic eyewash spray heads, an inline strainer and a stay-open 1/2" ball valve with a push handle.

STANDARD EQUIPMENT:

Spray Head Assembly: ABS yellow plastic eyewash heads with integral flip dust covers, internal flow controls and filters to remove debris from the water. An anti-microbial agent is molded into the ABS material, providing integrated protection.

Valve: 1/2" NPT chrome plated brass stay-open ball valve with a stainless steel push handle and a 50 mesh inline strainer.

Water Supply: 1/2" NPT female threaded, chrome plated brass inlet.

Waste: 1-1/4" NPT female outlet.

Bowl: Yellow, ABS plastic 11-3/4"

diameter bowl.

Piping & Mounting: Schedule 40 galvanized steel piping and a 9-1/8" diameter cast iron floor flange with a vellow powder coated finish.

Universal Sign: ANSI compliant, vertical identification sign.

Weekly Test Tag: A waterproof test card to record the date and inspector's name for weekly functional testing of the unit.





OPTIONAL ACCESSORIES:

Additional costs may be incurred

□ - BF Barrier free, handicap accessible

- FLW2 Flow switch, single pole

☐ - FPV Freeze protection valve

☐ - HFC Hand foot control

🔲 - IWH1 Instantaneous water heater - 208 volts

□ - IWH2 Instantaneous water heater - 240 volts MAP (magnetically actuated proximity) switch, ☐ - MS1

for one (1) actuator

- SDC Stainless steel dust cover

□ - SPV Scald protection valve

□ - SV2 Stainless steel ball valve

□ - ET71-1 Thermostatic mixing valve is ASSE Listed per the

ASSE 1071 standard. The tepid output water complies

with ANSI Z358.1 standard.

□ "1" Auxiliary hand-held drench hose with a self closing valve

(Use model S0311)





Acorn Safety assumes no responsibility for use of void or superseded data. © Copyright Acorn Safety®, City of Industry, CA, Division of Acorn Engineering Company® Member of Morris Group International™. Please visit www.acorneng.com for most current specifications.

Submittal # \$0310 [EW] Revised: 04/09/14

Product carries the following certifications:





ACORN SAFETY P.O. Box 3527


City of Industry, CA 91744 U.S.A. Phone 800-591-9372 626-855-4804


www.acorneng.com

TECHNICAL DIMENSIONS

All dimensions are subject to manufacturer's tolerance of plus or minus 1/2" nominal and subject to change without notice. Acorn Safety® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. © Acorn Safety®, A Division of Acorn Engineering Company®, Member of Morris Group International™. Please visit www.acorneng.com for most current specifications.

☐ Model S0310 : Pedestal Mounted Eyewash, Plastic Bowl

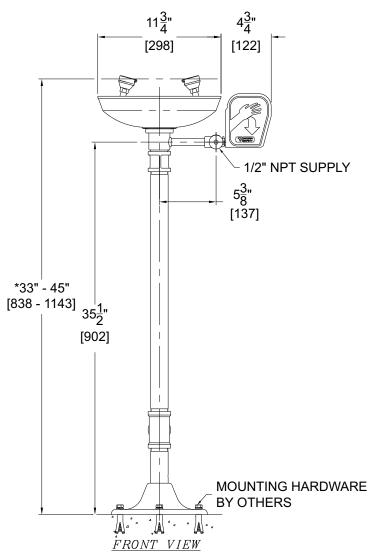

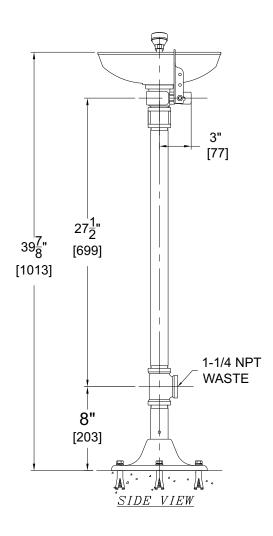

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. ANSI Z358.1 REQUIRES NOZZLES TO BE MOUNTED BETWEEN 33" 45" [838 1143] ABOVE THE FINISHED FLOOR.

\$0310 Revised: 04/09/14

Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acorn's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SUMMARY AL FOR TURING	Model Number & Options Company		_Quantity	ACORO SAFETY
SELECTION S & APPROV MANUFAC	Contact Signature (Approval for Manufacturing)	_Title		800-591-9372 or 626-855-4804 www.acorneng.com